
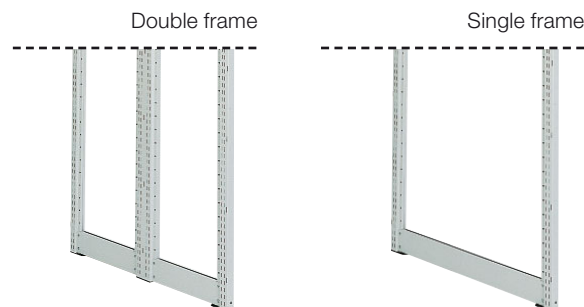


Dimensions and capacity

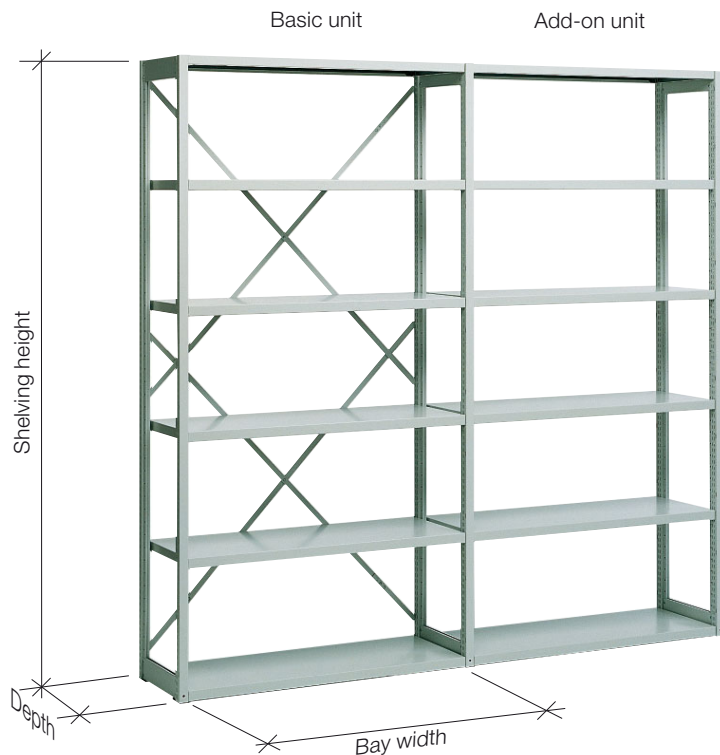

Dimensions

Height:

1632, 1832, 1952, 2032, 2112, 2232, 2312, 2592 and 2952 mm
(plus 3 mm high plastic base plates)

Depth:

250, 300, 350, 400, 450, 500, 600, 700 and 800 mm

Bay width:

900, 1000, 1100 and 1200 mm

Slotted frame profile:

Special steel profile

Shelf:

32 mm in height;
triple-folded longitudinal edges;
height-adjustment: 20 mm increments

Capacity

Bay capacity:

Depending on upright frame type
max 2000 kg

Shelf capacity:

Bay width 900 mm: max. 130 kg
Bay width 1000 mm: max. 120 kg
Bay width 1100 mm: max. 110 kg
Bay width 1200 mm: max. 100 kg

Quality assurance:

Our production complies with requirements under:

- RAL quality mark RAL-RG614/1
- GS mark for tested safety
- Quality management system pursuant to ISO 9001
- Environmental management system pursuant to ISO 14001
- Management system for occupational health and safety pursuant to ISO 45001
- Management system for Social Responsibility of organisations (CSR) pursuant to ONR 192500
- Certified pursuant to EN 1090- 1:2012 – Components for steel and aluminium supporting structures

We use only galvanised and powder-coated materials (duplex coating).

